

S1D040120D



TriQSiC™ 1200V Silicon Carbide Schottky Diode

Features



S1D040120D

1200V SiC Schottky Diode



Table of contents

Table of contents

Features1

Benefits1

Applications1

Table of contents2

1 Maximum ratings3

2 Thermal characteristics3

3 Electrical characteristics4

4 Electrical characteristic diagrams5

5 Package drawing (TO-247-3L)7

Revision history8

Attention8

3 Electrical characteristics


Table 4 Electrical characteristics (Per Leg, $T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V_F	Forward Voltage	1.38 1.85	1.6 2.2	V	$I_F = 20\text{A}$ $T_J = 25$ $I_F = 20\text{A}$ $T_J = 175$	Fig.1
I_R	Reverse Current	1 10	100 200	μA	$V_R = 1200\text{V}$ $T_J = 25$ $V_R = 1200\text{V}$ $T_J = 175$	Fig.2
Q_c	Total Capacitive Charge	110	-	nC	$V_R = 800\text{V}$ $I_F = 20\text{A}$ $di/dt = 200\text{A}/\mu\text{s}$ $T_J = 25$	Fig.4
C	Total Capacitance	2120 104 76	-	pF	$V_R = 0\text{V}$ $T_J = 25$ $f = 1\text{MHz}$ $V_R = 400\text{V}$ $T_J = 25$ $f = 1\text{MHz}$ $V_R = 800\text{V}$ $T_J = 25$ $f = 1\text{MHz}$	Fig.3
E_C	Capacitance Stored Energy	60	-	μJ	$V_R = 800\text{V}$	Fig.5

S1D040120D

Figure 7. Current Derating

Figure 8. Power Dissipation vs. Temperature

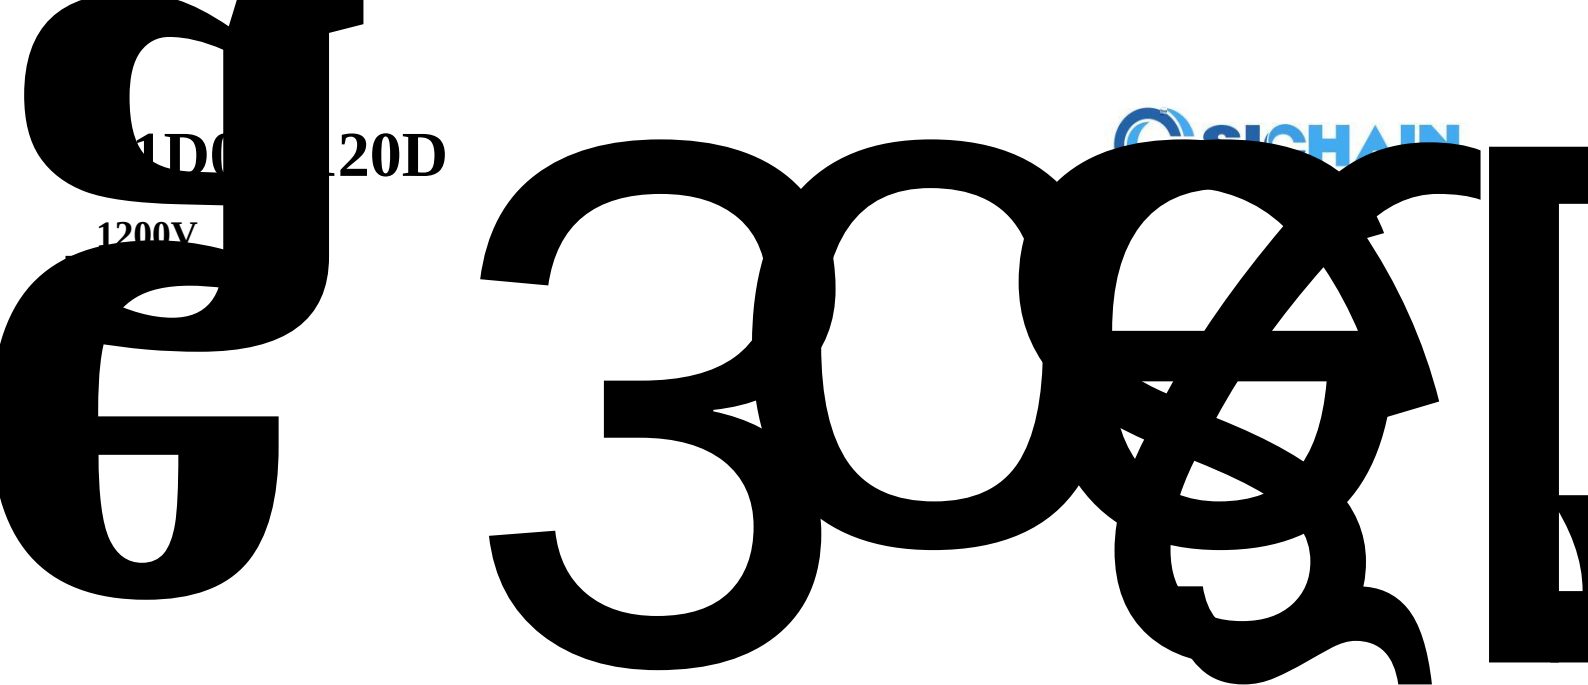

S1D040120D

1200V SiC Schottky Diode




Revision history

Document version	Date of release	Description of changes
V02_00	2024-08-05	--
V02_01	2024-08-07	--
V02_02	2024-10-28	--
V02_03	2024-12-02	--

Attention

1. RoHS compliance

The 1200V SiC Schottky Diode is RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance r

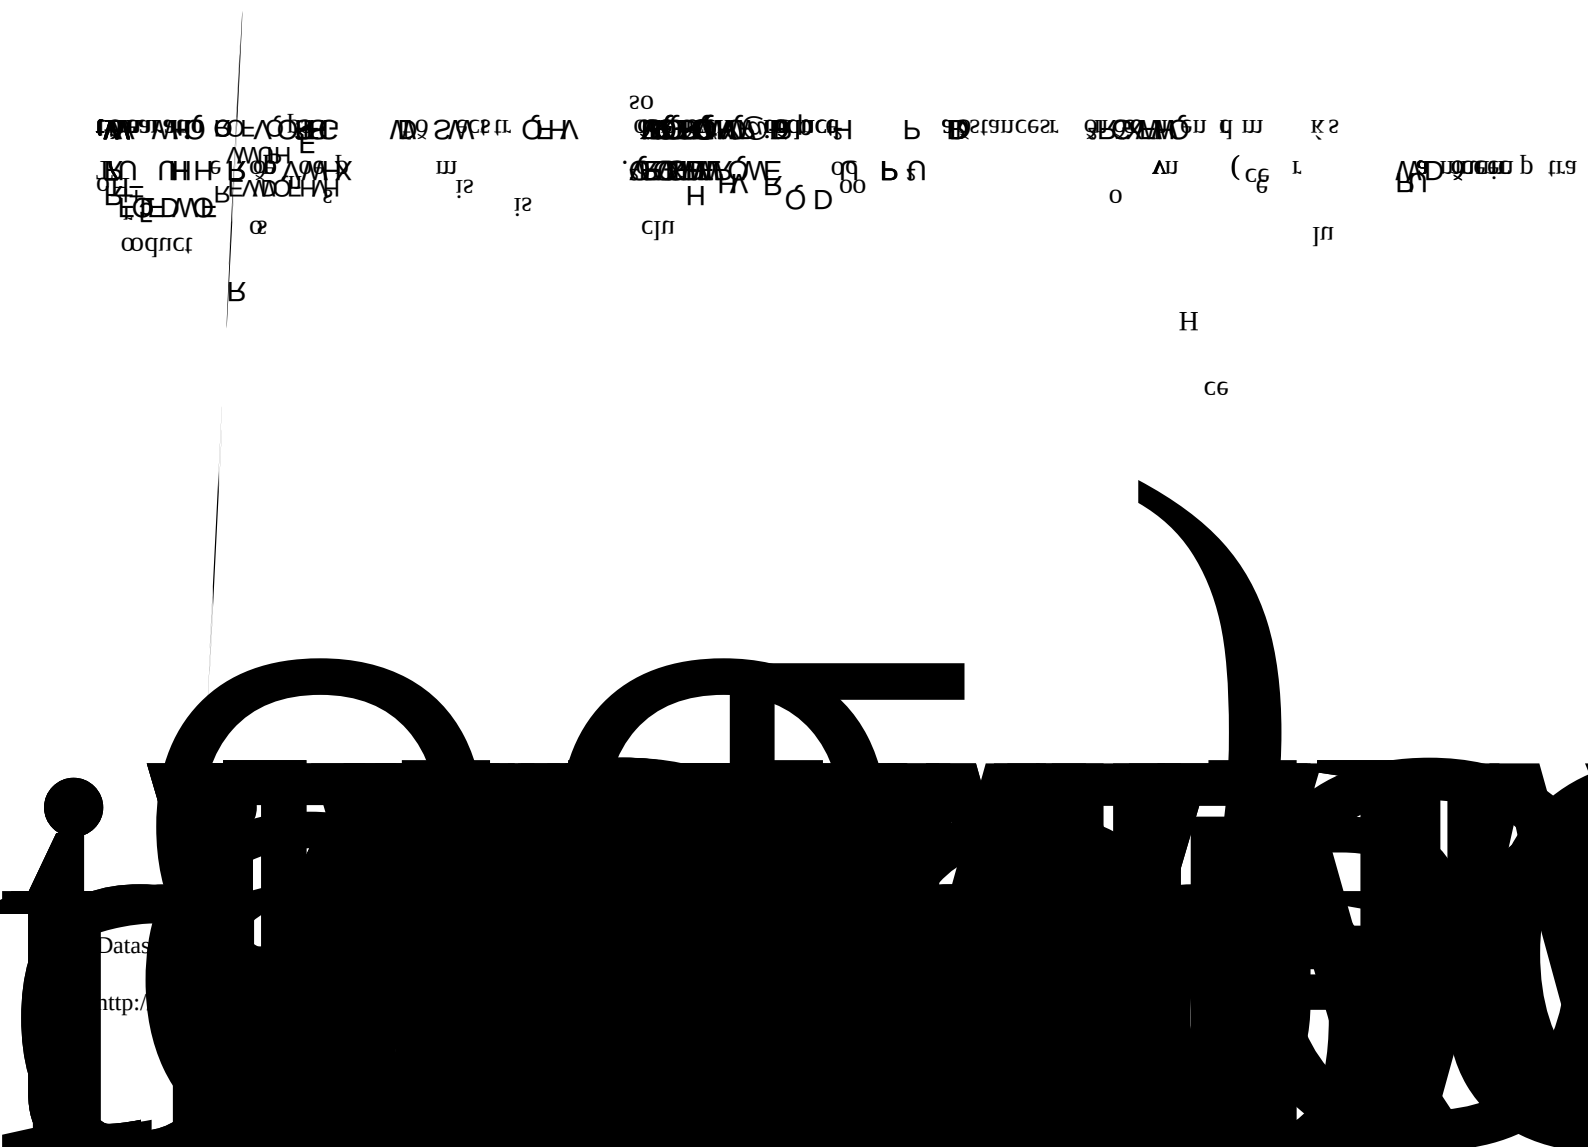

S1D040120D



7. Except as otherwise explicitly approved by Sichain in a written document signed by authorized representatives of Sichain, Sichain' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

8. For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a Sichain representatives, for example but not limited to: transportation equipment, primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.